


Pre - Installation Notes

- Follow all national and local building/electrical codes.
- Transformer must be plugged into a GFCI outlet.
- Transformer can support up to 50 watts output.
- Don't cut any wires. Extra wire length can be coiled up.
- Do not use extension cords.
- Do not use within 10 feet of ponds, pools, or spas.
- If using insulated wire staples to hold the wires in place, be sure not to pierce or crush the wires.
- Do not mount in direct sunlight. Keep away from external heat sources.


12 Volt 50 Watt DC Smart Transformer

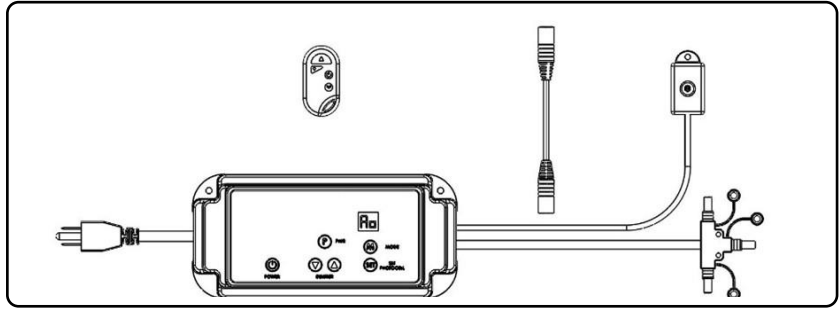


Step 1

Mount the Transformer and Photocell

1.1 Use (2) stainless steel screws (not included) to mount the transformer a minimum of 12" above the ground level and within reach of a 120V AC GFCI outlet. The 120V AC power cord attached to the transformer is 5 feet long. The transformer can be mounted under the deck but the control panel on the transformer should be accessible to change settings.

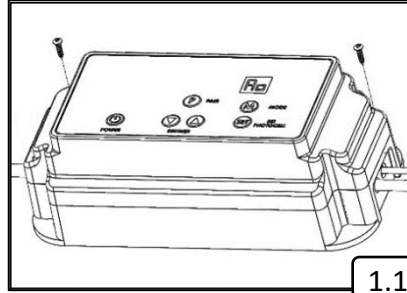


1.1

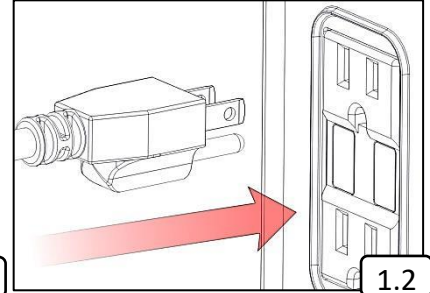


1.2

1.2 Plug the transformer into the GFCI outlet.

1.3 Use a stainless steel screw (not included) to mount the photocell in a location that can sense dusk and dawn (night and day) conditions. The attached photocell cord is 5 feet long.

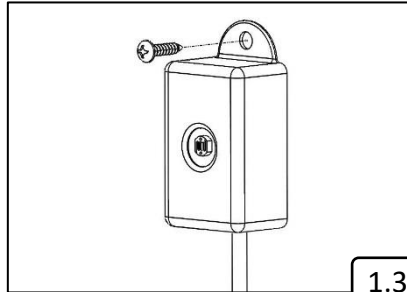

1.3

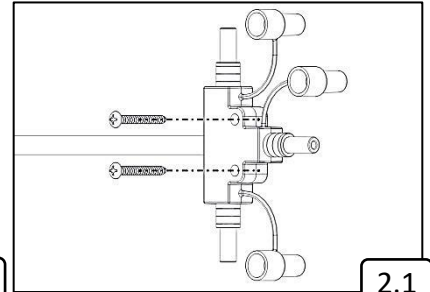


2.1


Step 2

Mount the Tee Connector

2.1 Run the 4 foot output power cable with Tee Connector attached to the location of the first light or a central location if lights will be located in multiple directions. The Tee Connector can be secured loosely using (2) #4 x 1" stainless steel screws (not supplied). Do not tighten the screws completely as this can damage the Tee Connector.

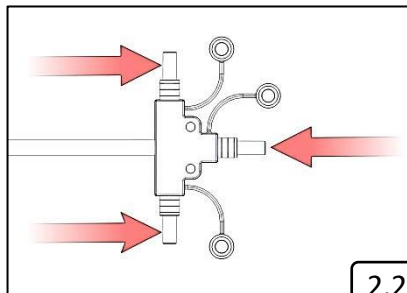

2.2

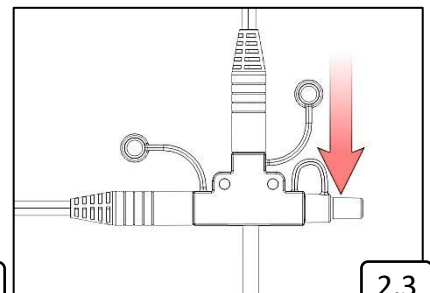

2.3

2.2 If needed, all 3 of the output connectors on the Tee Connector are active and will supply equal power to the entire system.

2.3 Any unused Tee Connector terminals or splitters in the system must be sealed using the attached cap.

Step 3

Install the Lights and Finalize Installation

3.1 Connect the rest of the Main Wiring Connections (not included) per their individual instructions.


3.2 Connect the desired light fixtures (not included) per their individual instructions.

3.3 Refer to the included Control Instructions for operation of the transformer. The Control Instructions should be retained for future reference.

Step 4

Closed Loop Connector (optional but recommended)

4.1 Included with the transformer is a closed loop connector. The closed loop connector has a red female connector on each end and is 6" long. The closed loop connector is used to connect the Main Wiring back into the transformer. This reduces the voltage drop across the wiring in the system.

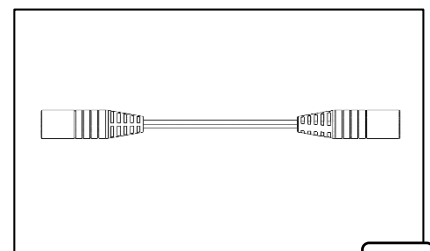

4.1

4.2 Use a 2 output splitter on the last light fixture of the run. Plug the last light fixture into one of the 2 outputs splitters male connections. Plug an extension harness into the other male connection of the 2 output splitter. Run enough extension harnesses end to end to reach back to the Tee Connector of the transformer. Use the closed loop connector to make the connection between the extension harness and the Tee Connector.